
Two-side electrohydraulic control

Control types

❶: With AMP JPT connector - AMP JPT mating connector, code: 5CON003


❷: With Deutsch DT04 connector - Deutsch DT06-2S mating connector code: 5CON140031

13EB3 type controls are not available for HF sections.

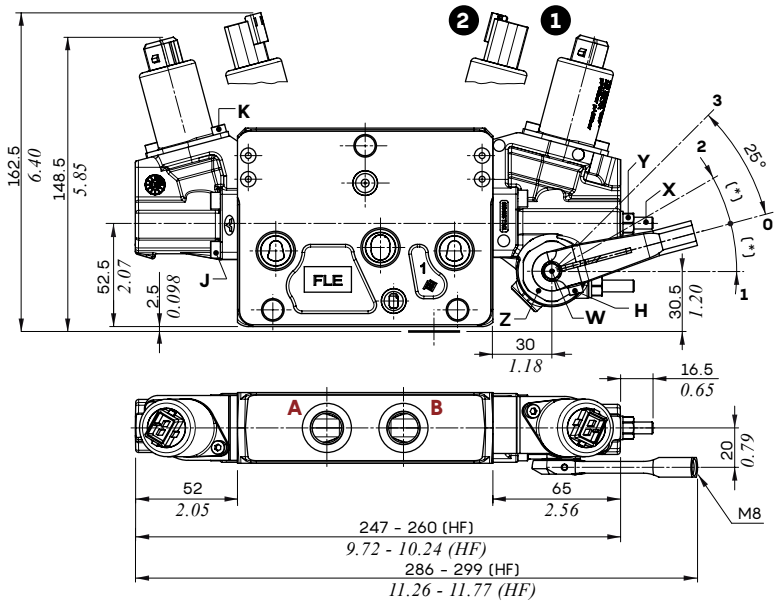


Angle (*): 15° with 8EB3.. type controls; 14° with 13EB3.. type controls

Note: for more dimensions see previous pages

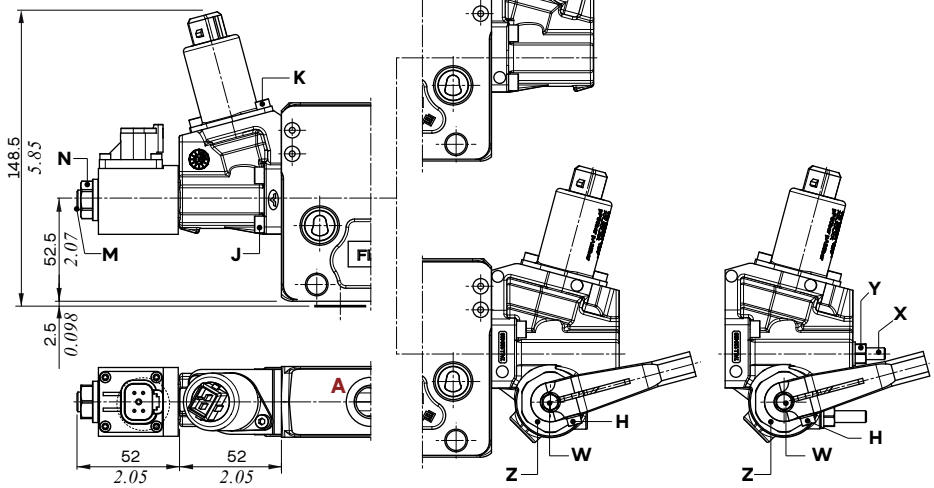


Types 8EB3TLHF3 - 8EB34TLHF3

Lever control with spool stroke limiter



Types 13EB3TLHF3 - 13EB34TLHF3

For floating circuit




Wrenches and tightening torques

H = allen wrench 3 - 6.6 Nm *(4.9 lbft)*
J = allen wrench 4 - 6.6 Nm *(4.9 lbft)*
K = allen wrench 3 - 5 Nm *(3.7 lbft)*
M = allen wrench 4 - 9.8 Nm *(7.2 lbf)*
N = wrench 17 - 9.8 Nm *(7.2 lbft)*
X = allen wrench 3
Y = wrench 10 - 9.8 Nm *(7.2 lbft)*
Z = wrench 29 - 24 Nm *(17.7 lbft)*
W = wrench 8


Type 8EB3TSPSD

Without lever control and digital output sensor SPSD

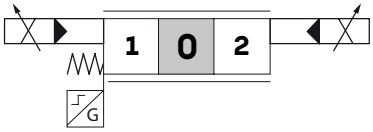


Type 8EB34TSPSL

Without lever control and analog output sensor SPSL

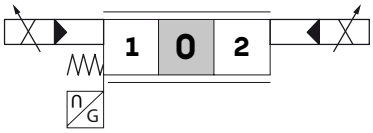

Type 8EB3TLHSPSD

With lever control and digital output sensor SPSD

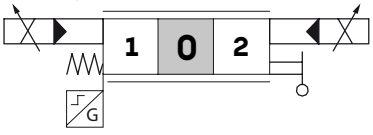

Type 8EB3TLHF3SPSL

Analog output sensor SPSL, with lever control and spool stroke limiter

