
Direct solenoid control

D41 type: ON/OFF one side

Drawing is referred to a Q25 monoblock valve.

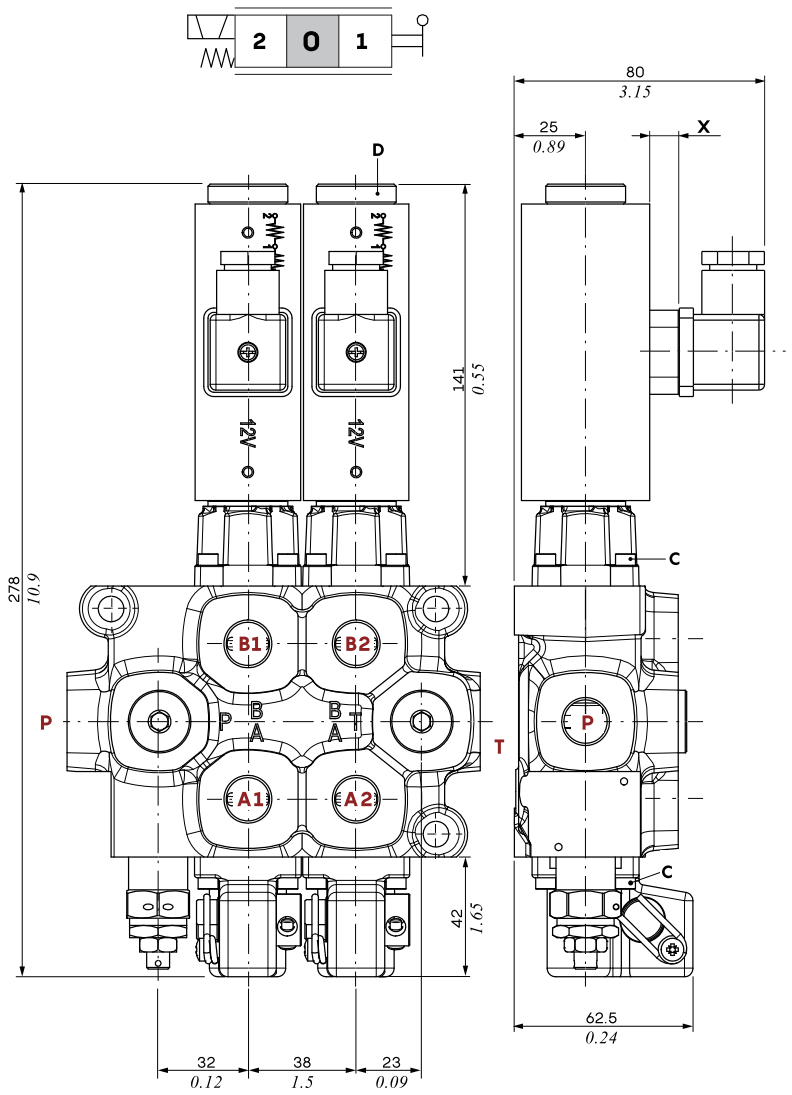


D41 coil		
	Q25	Q45
Nominal voltage	12 VDC 24 VDC	
Nominal voltage tolerance	±10%	
Power rating	58 W	52 W
Insulance	Class H	
Weather protection	IP65	

Connector type: ISO4400 3P+T-PG11


X		
	Coil type	mm - *in*
Q25	ZEB012 coil	10 - *0.39*
	ZEB024 coil	
Q45	4SLG111200 coil	8 - *0.31*
	4SLG111200 coil	

Wrenches and tightening torques
C = allen wrench 3 - 3 Nm *(2.2 lbft)*
D = manual tightening - 6.6 Nm *(7.2 lbft)*


Dynamic conditions

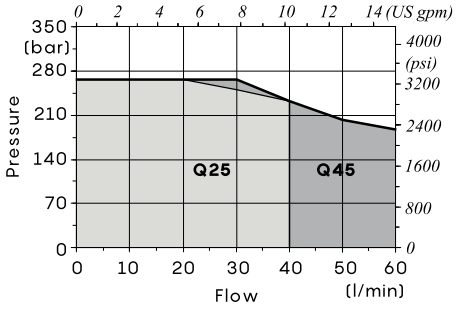

P⇒T pressure drops

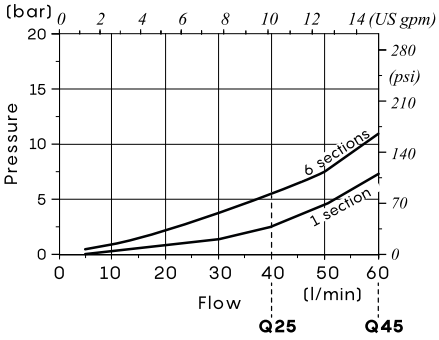

P⇒A(B) pressure drops

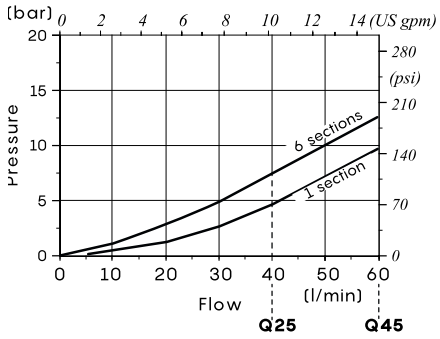

A(B)⇒T pressure drops

