
Variable Displacement Vane Pump





油壓記號 SYMBOL



MODEL CODE

VCM - SF - 20 -B - 10

設計□□	Design No.
壓力範圍 A:20 kgf/cm²	Pressure range C:55 kgf/cm²
B:35 kgf/cm²	D:70 kgf/cm²
凸輪環排量 12L,20L,30L,40L	Displacement at 1800 rpm 12L, 20L, 30L, 40L
系列號碼：	Series No.
輪葉式浦系列	Vane pump series

Feature:

1. High efficiency operation with minimum power loss.
2. Very low noise when operating.
3. Compactness and simple design, space saving and easy operation.
4. Sturdy structure for high efficiency and long service life.

/DOUBLE PUMP ORDERING CODE

VCM - DF - 30 - B/30- B - 10


設計□□	Design No.
後式浦壓力	Secondary Pump Pressure
後	式浦流量
12L,20L,30L,40L	12L,20L,30L,40L
Secondary Pump Displacement	
前式浦壓力	Shaft end Pump Pressure
前	Shaft end Pump Displacement 式浦流量
12L,20L,30L,40L	12L,20L,30L,40L
系列號碼：	Series No.
輪葉式浦系列	Vane Pump Series

Variable Displacement Vane Pump


TECHNICAL DATA

MODEL	DELIVERY AT NO LOAD (L/min)		PRESSURE ADJRANGE (kgf/cm²)	SHAFT SPEEDRANGE (rpm)		MAX. PRESSURE (kgf/cm²)	WEIGHT (kg)
	1800rpm	1500rpm		MAX.	MIN.		
SF-12A	12	10	10-20	1800	800	20	5.0
SF-12B			15-35			35	5.0
SF-12C			30-55			55	5.0
SF-12D			50-70			70	5.0
SF-20A	20	17	0-20	800	800	20	5.0
SF-20B			5-35			35	5.0
SF-20C			30-55			55	5.0
SF-20D			50-70			70	5.0
SF-30A	30	25	10-20	1800	800	20	9.0
SF-30B			15-35			35	9.0
SF-30C			30-55			55	9.0
SF-30D			50-70			70	9.0
SF-40A	40	35	10-20	1800	800	20	9.0
SF-40B			15-35			35	9.0
SF-40C			30-55			55	9.0
SF-40D			50-70			70	9.0


SF-12＊-10

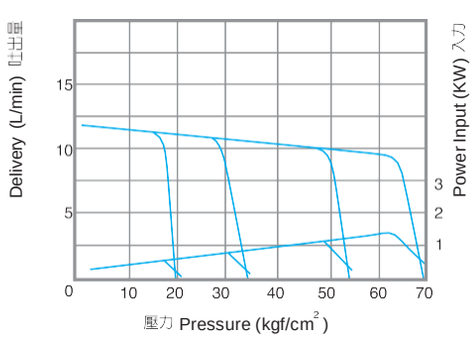


SF-20＊-10

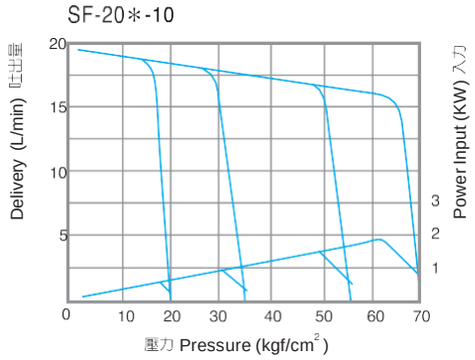

SF-30＊-20

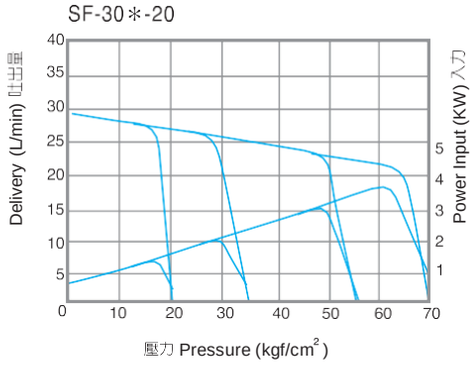


SF-40＊-20

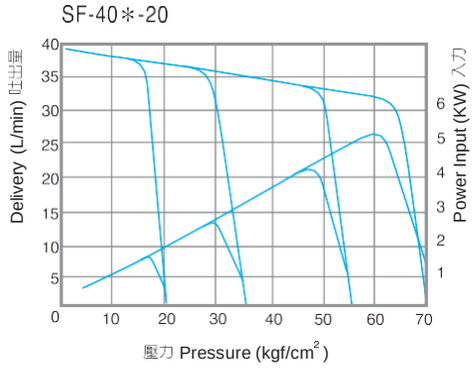


Variable Displacement Vane Pump

- SF-12Σ-10
- SF-20Σ-10

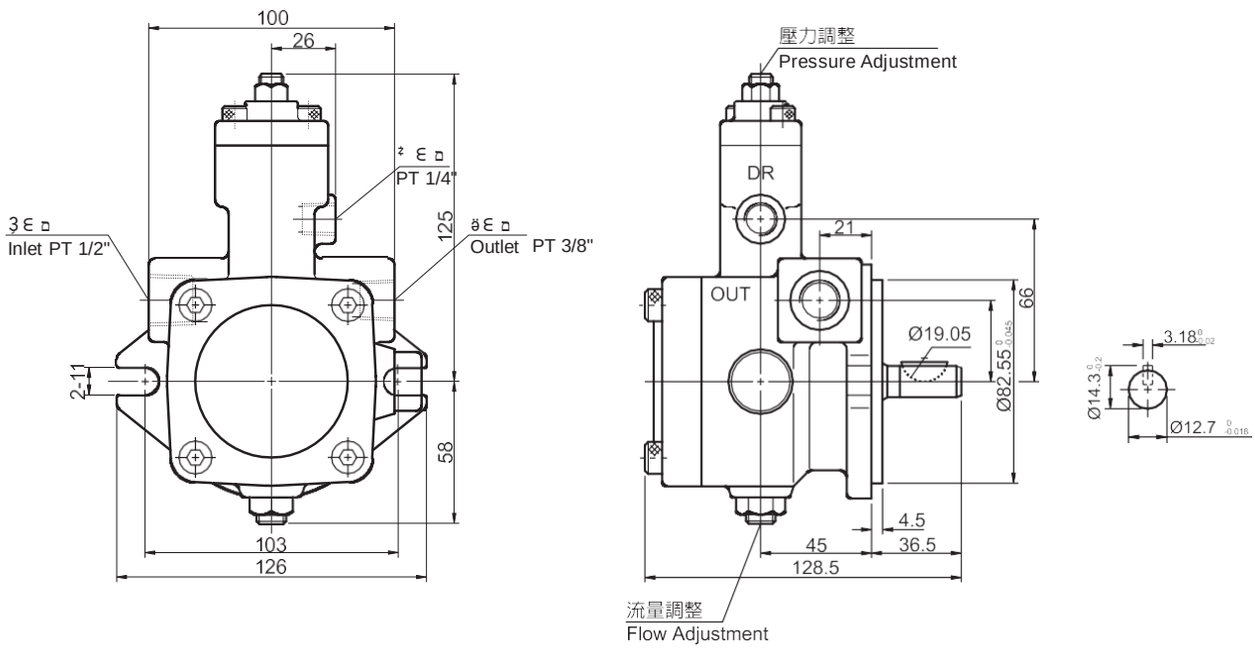


- SF-30Σ-20
- SF-40Σ-20

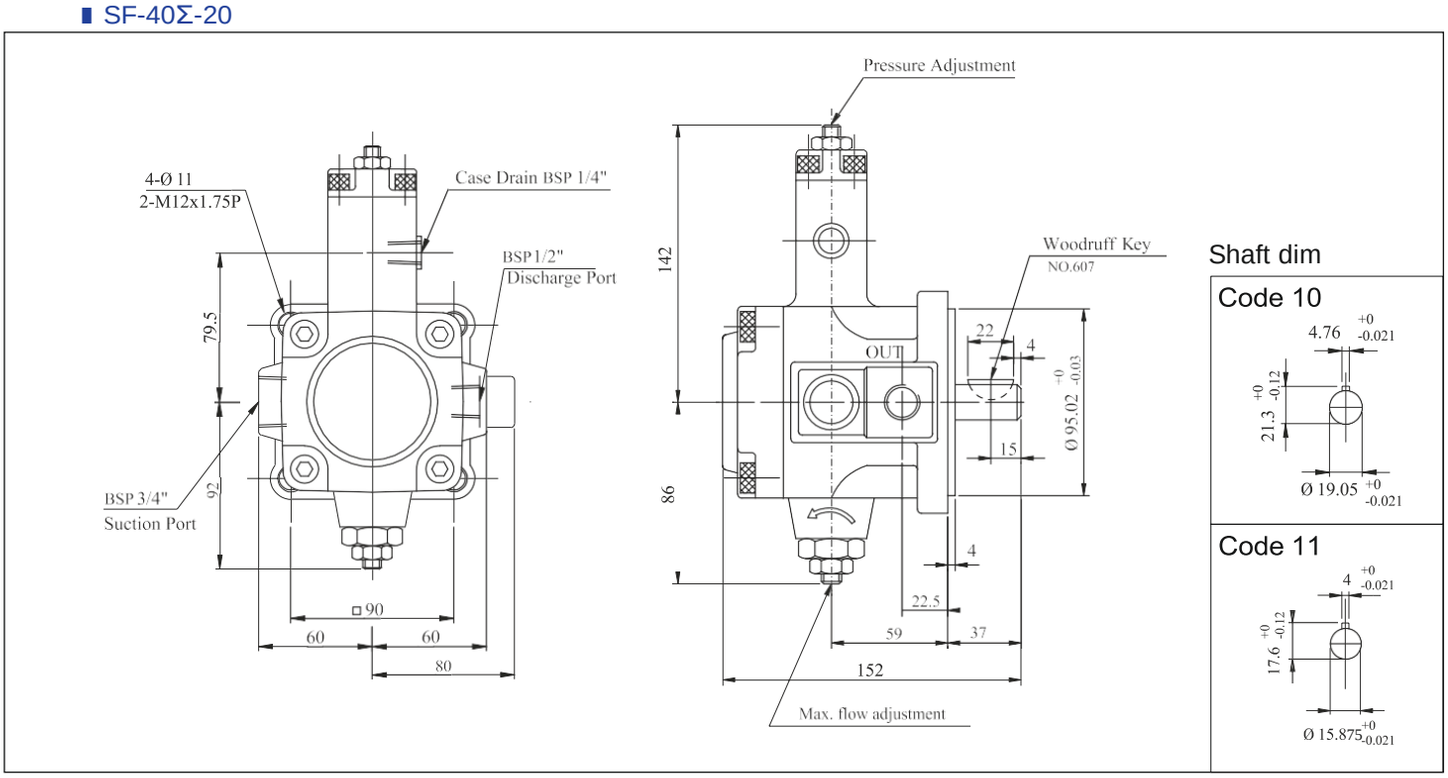

Variable Displacement Vane Pump

- DF-12Σ-12Σ-10
- DF-20Σ-20Σ-10

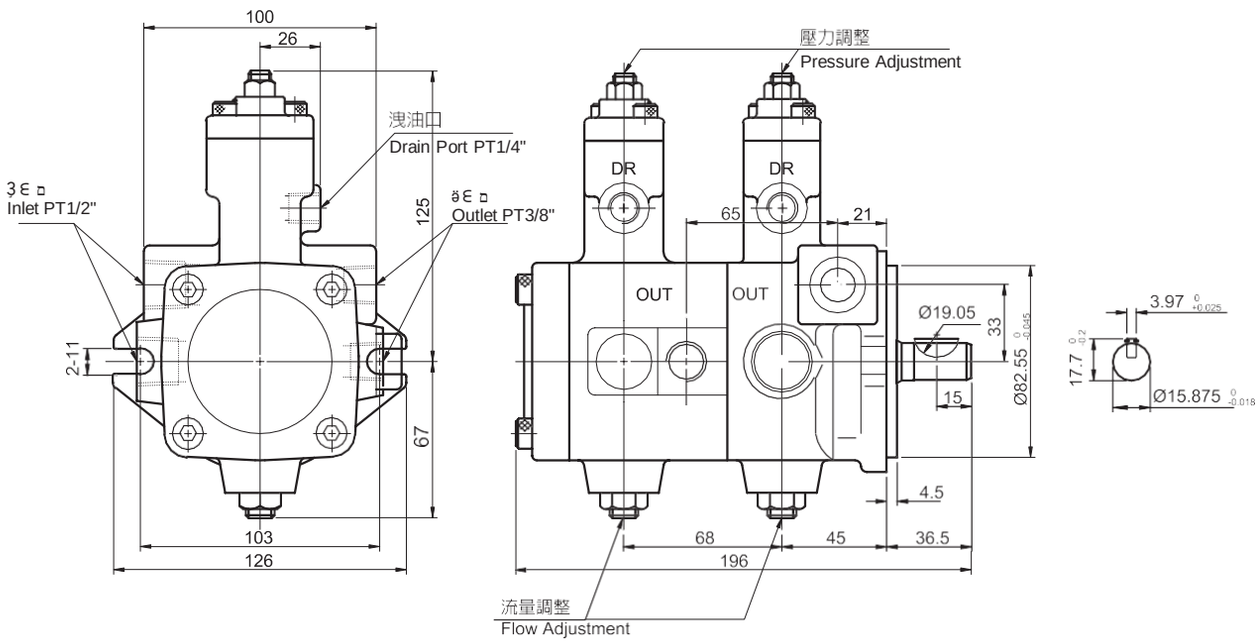

- DF-30Σ-30Σ-10
- DF-40Σ-40Σ-10

