

Hidro Pnevmo Tehnika
3,Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228
Fax : +359 431/ 62 019
e-mail : info@hpt-bg.com
www.hpt-bg.com


HYDRAULIC DIRECTIONAL VALVE WITH AUTOMATIC SWITCHING


4/2 RHA 10/20A





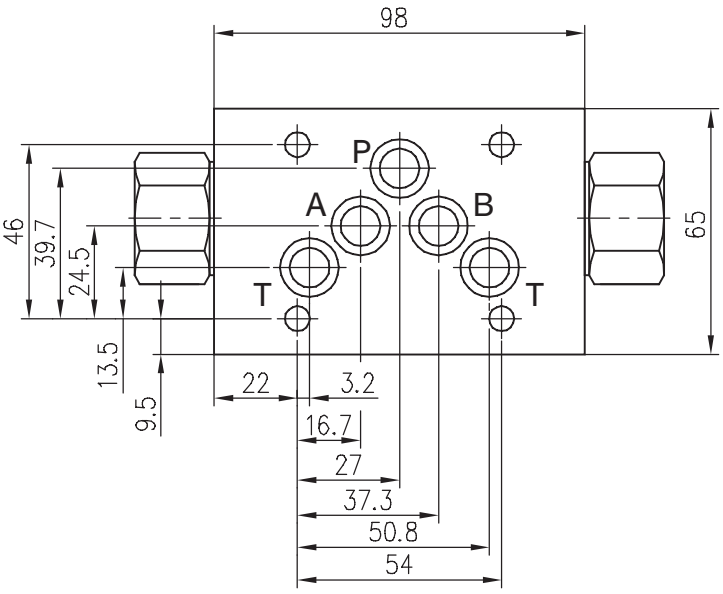

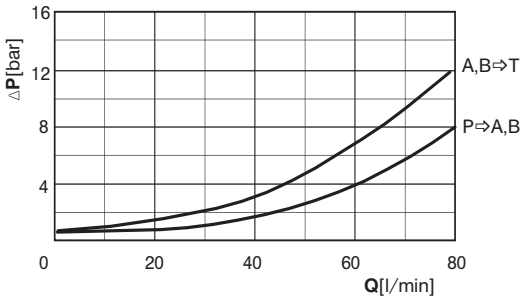

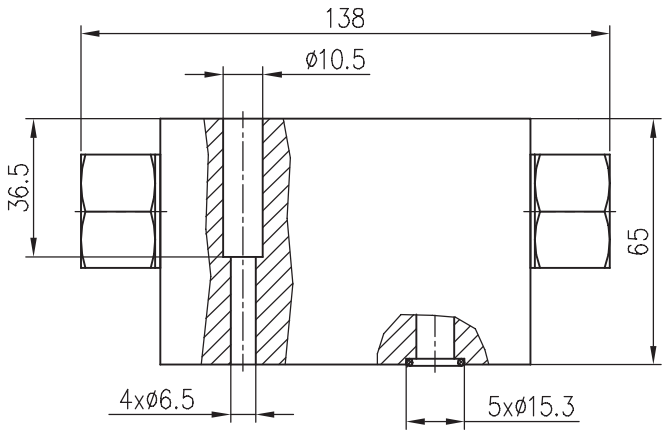

TECHNICAL DATA		
Working pressure	*bar*	30...210
Flow rate	*L/min*	3...80

Working fluid - mineral oil with viscosity from 10 to 400 cSt at 50 °C .
Temperature range: -20°C...+80°C.
Filtration absolute: 25μm .
Mounting plate-
acc. To ISO 4401-AB-05-4A(CETOP5)
Tightening torque of connecting screws on the mounting plate - 14 N.m