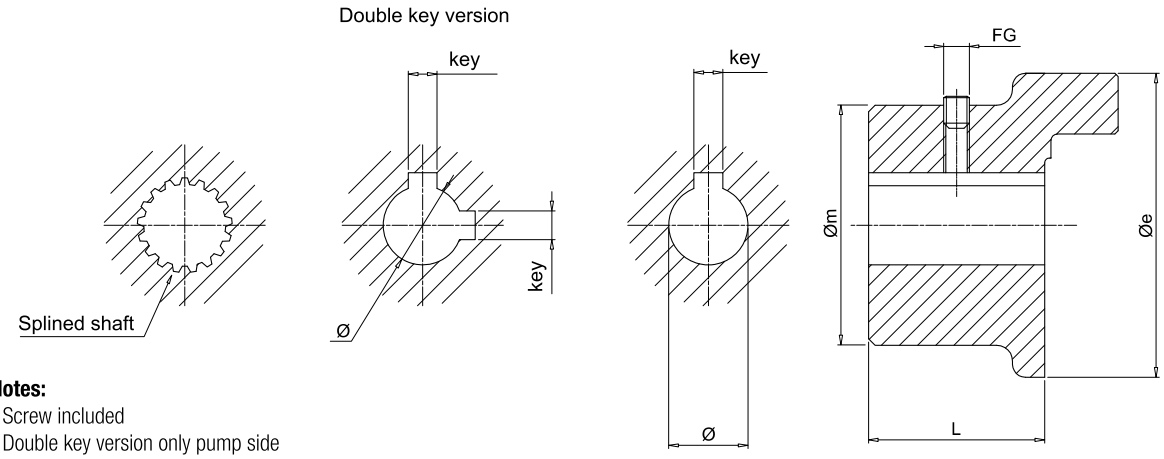


Notes:
- Screw included
- Double key version only pump side

Motor half-coupling

IEC - Electric motors Motor size	Shaft end [Ø x L]	Half-coupling code	Dimensions [mm] Øe	Øm	L	Ø	key	FG	Weight [kg]
63	11x23	**SGEG01M01021**	40	50	21	11	4	M6	0.32
71	14x30	**SGEG01M02028**	40	50	28	14	5	M6	0.42
80	19x40	**SGEG01M03040**	40	50	40	19	6	M6	0.61
90	24x50	**SGEG01M04050**	40	50	50	24	8	M6	0.77
100 - 112	28x60	**SGEG30M05060**	80	65	60	28	8	M8	2.35
		SGEG40M05060	95	75	60	28	8	M8	2.65
132	38x80	**SGEG30M06080**	80	65	80	38	10	M8	3.15
		SGEG40M06080	95	75	80	38	10	M8	3.55
160	42x110	**SGEG40M07110**	95	75	110	42	12	M8	4.70
180	48x110	**SGEG40M08110**	95	95	110	48	14	M8	4.55
200	55x110	**SGEG40M09110**	95	95	110	55	16	M8	4.35
		SGEG60M09110	120	98	110	55	16	M8	9.00
225	60x140	**SGEG60M10140**	120	118	140	60	18	M8	12.30
250	65x140	**SGEG60M11140**	120	118	140	65	18	M8	12.00
		SGEG80M11140	160	138	140	65	18	M8	18.30
280	75x140	**SGEG80M12140**	160	138	140	75	20	M10	17.70
		SGEG90M12100	200	160	100	75	20	M10	21.00
315	80x170	**SGEG80M13170**	160	138	170	80	22	M10	20.60
		SGEG90M13100	200	160	100	80	22	M10	20.00
355	95x140	**SGEG90M15100**	200	160	100	95	25	M10	19.00
400	100x210	**SGEG90M16100**	200	160	100	100	28	M10	18.00

Pump half-couplings

Half-coupling code	Dimensions [mm] Ø min	Ø max	Øe	L min	L max	Standard lengths [mm]
SGEG01 * *****	-	24	40	20	50	every 5 mm
SGEG30 * *****	-	42	80	30	80	
SGEG40 * *****	-	55	95	30	110	
SGEG60 * *****	-	75	120	40	140	
SGEG80 * *****	-	85	160	50	170	
SGEG90 * *****	-	100	200	40	100	

Complete the half-coupling code with the shaft's code and length
Example: **SGEG40PD02040**

PD02 - see page 19
040 - table "pump half-coupling - standard lengths"

All SGEG series half-couplings are supplied with a grub screw hole as standard, and with a grub screw **UNI 5929 DIN 916** fitted to the hub.
Note: For lengths other than those indicated in "Pump half-coupling" table, contact MP Filtri Technical and Sales Department.